




Shanghai Yifeng New Materials Co., Ltd.

Add: 10#,No.288,Xihan Road,Fengxian District,Shanghai
No. 355, Jiuhua South Road, Yijiang District, Wuhu City, Anhui Province
Tel: 021-37691510 / 60753800 Fax: 021-37691206
E-mail: sh_yifeng@126.com Http: // www.sh-yfcon.com

YIFENG
NEW MATERIALS

上海轶峰新材料股份有限公司
Shanghai Yifeng New Materials Co., Ltd.

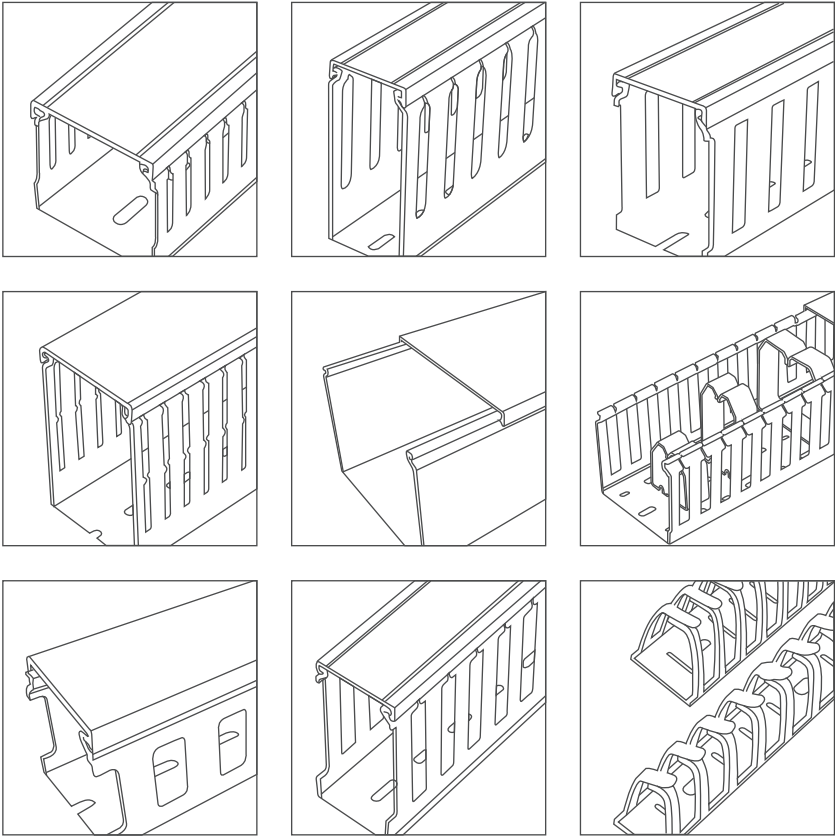



Shanghai Yifeng

Ticker symbol: 839754



绿色工厂
Green Plant



Company Information

Shanghai Yifeng New Materials Ltd is the leading manufacturer of electrical accessories which was established in 2009, located at Shanghai, China.

Yifeng dedicated to R&D and manufacture for the sustainably developing electrical wiring segment, and is been regarded as a venture business in China who applied new materials and technologies to this segment. Yifeng has achieved many patents and qualifications and we keep improving and optimizing our products in terms of quality and efficiency. These achievements add remarkable value and competitiveness to our customers in industries of railways, nuclear power, new energies, ships and marine , aerospace, power delivery, machinery, automation and so on.

Yifeng adopts new technologies and manufacturing method, and strictly follows ISO9001 in quality management. Our products are certified with UL, CE, RoHs, REACH , EN45545 and more, and we are the leading electrical accessories company in China with high quality products in the wiring segment. We deserve your trust.



Patents & Qualifications



Catalogue
目录

LSZH(Low Smoke Zero Halogen)	1-12
L-UD/R VD/R LSZH wiring duct (Enhanced version)	3-4
L-UD LSZH wiring duct (Wide sliver, Opened slot)	5-6
L-VD LSZH wiring duct (Narrow sliver, Opened slot)	7-8
L-OD LSZH wiring duct (Wide sliver, Closed slot)	9-10
L-MD LSZH wiring duct (Solid)	11-12
SWD International standard flame retardant Eco-wiring duct	13-22
SWD Eco-wiring duct (Wide sliver, Opened slot)	15-16
SWD Eco-wiring duct (Narrow sliver, Opened slot)	17-18
SWD Eco-wiring duct (Wide sliver, Closed slot)	19-20
MD solid wiring duct	21-22
Anti-slip UL flame retardant Eco-wiring duct	23-36
N-UD anti-slip UL wiring duct (Wide sliver, Opened slot)	25-26
N-VD Anti-slip UL wiring duct (Narrow sliver, Opened slot)	27-28
N-OD Anti-slip UL wiring duct (Wide sliver, Closed slot)	29-30
N-UFD Double Separated Anti-slip UL wiring duct (Wide sliver, Opened slot)	31-32
N-VFD Double Separated Anti-slip UL wiring duct (Narrow sliver, Opened slot)	33-34
N-MD Anti-slip UL wiring duct (solid)	35-36
Wiring duct accessories	37-46
SWD-KB/N-KB PVC Cover	39-40
L-KB / L/R-KB LSZH PC+ABS cover	41-42
DS Flexible dragon bone wiring duct / FD Open type flexible wiring duct	43-44
Wiring duct cutter / Wire retainer	45-46



YIFENG NEW MATERIALS



LSZH(Low Smoke Zero Halogen)

Made of PC+ABS macro-molecule materials, LSZH, Eco.

L-UD/R VD/R LSZH wiring duct (Enhanced version)

L-UD LSZH wiring duct (Wide sliver, Opened slot)


L-VD LSZH wiring duct (Narrow sliver, Opened slot)

L-OD LSZH wiring duct (Wide sliver, Closed slot)

L-MD LSZH wiring duct (Solid)




L-UD/R VD/R
LSZH wiring duct
(Enhanced version)

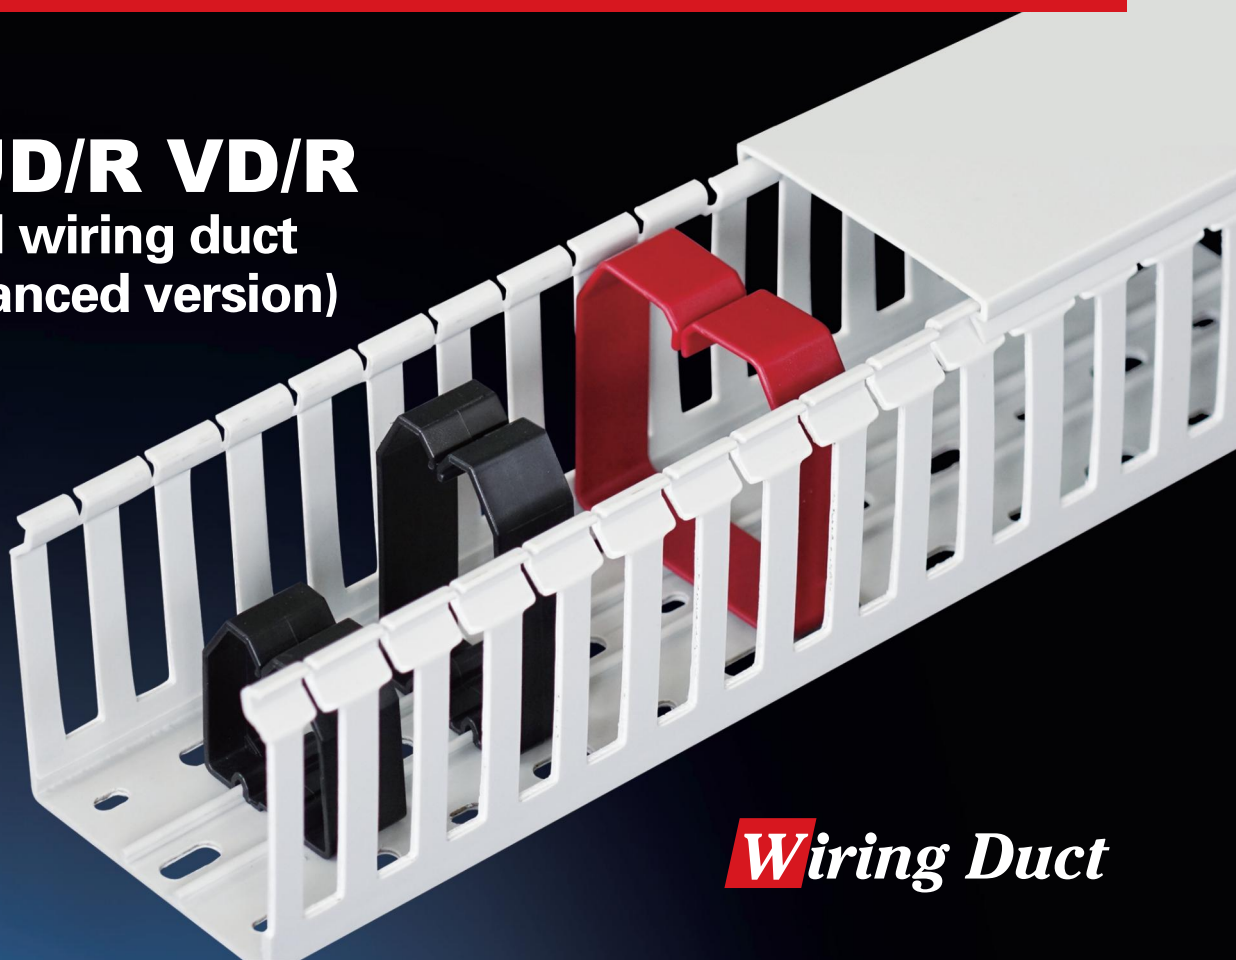

Wiring Duct

L-VD/R LSZH wiring duct (Enhanced version)



Specification	Size (mm)		Slot Width mm	Sliver Width mm	Wire capacity 2.0mm ² /pcs	Packing M
	H	W				
L-VD/R 25/25	25	25	6	6.5	10-25pcs	100
L-VD/R 37.5/37.5	37.5	37.5	6	6.5	15-30pcs	100
L-VD/R 37.5/50		50	6	6.5	20-35pcs	100
L-VD/R 50/25		25	6	6.5	20-30pcs	100
L-VD/R 50/37.5	50	37.5	6	6.5	20-35pcs	100
L-VD/R 50/50		50	6	6.5	80-90pcs	80
L-VD/R 50/75		75	6	6.5	180-200pcs	48
L-VD/R 50/100		100	6	6.5	220-250pcs	48
L-VD/R 75/25	75	25	6	6.5	50-55pcs	60
L-VD/R 75/37.5		37.5	6	6.5	110-115pcs	60
L-VD/R 75/50		50	6	6.5	180-200pcs	48
L-VD/R 75/75		75	6	6.5	200-250pcs	36
L-VD/R 75/100		100	6	6.5	260-320pcs	24

Latest Information from our website

Description



- **Materials**
PC+ABS, LSZH, RoHs compliant, Insulating, flame retardant, high stability.

■ **Certification**
EN45545 ,Q/CR699 ,QCRRCJ26, TB/T3139

■ **Color** Grey RAL 7035 (Special color can be customized)

■ **Construction**
1.Side width is enhanced gradually from the top to the bottom, in order to improve the strength and reliability.
2.Double layers are applied to the joint of cover and sides, making it easier to disassemble but more secured.
3.The right angle at the bottom is designed as easily unfolded and internally concave structure, making it easier to cut and unfold for wire exits, and look neat and safe to wires.
4.The rails on the floor allows, allowing to add traps to tighten wires and make it organized, neat and save space.
- **Flame retardancy**
UL94V-0

■ **Working temperature**
-40℃~90℃

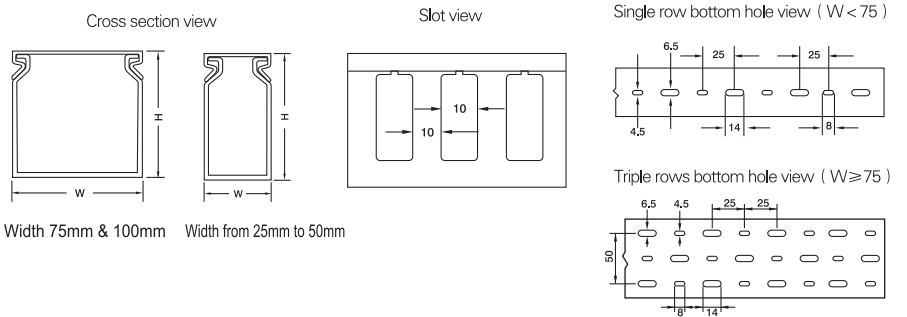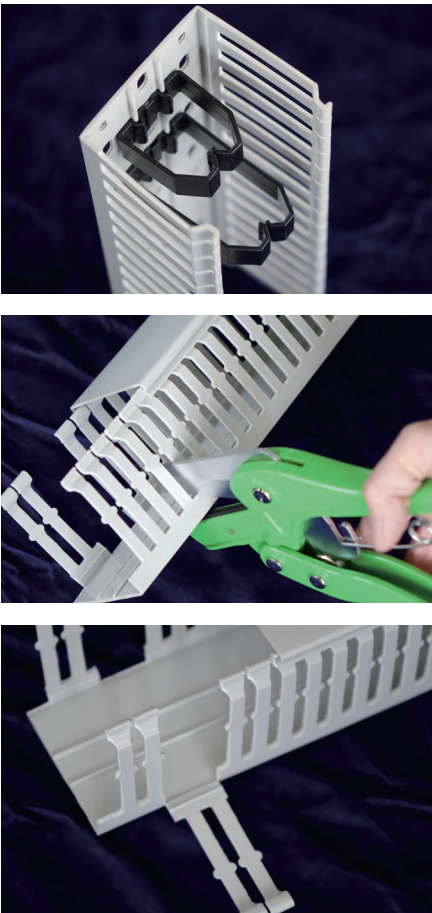

L-UD/R LSZH wiring duct (Enhanced version)

Specification	Size (mm)		Slot Width mm	Sliver Width mm	Wire capacity 2.0mm ² /pcs	Packing M
	H	W				
L-UD/R 37.5/37.5	37.5	37.5	10	10	15-30pcs	100
L-UD/R 37.5/50		50	10	10	20-35pcs	100
L-UD/R 50/25	50	25	10	10	20-30pcs	100
L-UD/R 50/37.5		37.5	10	10	20-35pcs	100
L-UD/R 50/50		50	10	10	80-90pcs	80
L-UD/R 50/75		75	10	10	180-200pcs	48
L-UD/R 50/100	75	100	10	10	220-250pcs	48
L-UD/R 75/25		25	10	10	50-55pcs	60
L-UD/R 75/37.5		37.5	10	10	110-115pcs	60
L-UD/R 75/50		50	10	10	180-200pcs	48
L-UD/R 75/75		75	10	10	200-250pcs	36
L-UD/R 75/100	100	100	10	10	260-320pcs	24
L-UD/R 100/100		100	10	10	300-400pcs	24

Latest Information from our website



L-UD LSZH wiring duct

(Wide sliver, Opened slot)

Wiring Duct

Description

Material

PC+ABS, LSZH, RoHs compliant, Insulating, flame retardant, high stability.

Flame retardancy

UL94V-0, Non-flame propagator.

Certification

EN45545, Q/CR699,
QCRRCJ26, TB/T3139.

Construction


- 1.Consist of base and cover, Easy and firm snap-on assembly, smooth joining for a better finish.
- 2.With aligned slot, Smooth corners and edges will not damage or disfigure wires.
- 3.All sizes and diverse slots and bottom hole design, easy for Cable arrangement and disassembly.
- 4.Special marking line design on the cover can allow a quick tag of relevant components.

Color


Grey RAL 7035 (Special color can be customized)

Working temperature


-40°C~90°C

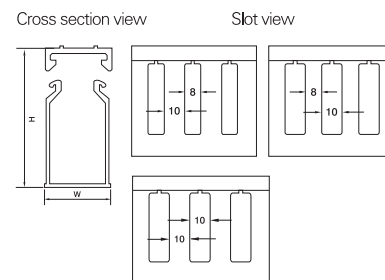

Single row bottom hole view (W < 80)

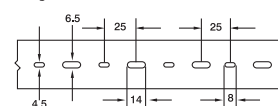

Triple rows bottom hole view (W ≥ 80)

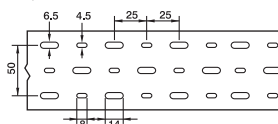

L-UD LSZH wiring duct (Wide sliver, Opened slot)

Specification	Size (mm)		Slot Width mm	Sliver Width mm	Wire capacity 2.0mm² /pcs	Packing M
	H	W				
L-UD 35 35	35	35	10	8	20-25pcs	100
L-UD 40 25	40	25	8	10	20-30pcs	100
L-UD 40 30		30	8	10	35-40pcs	100
L-UD 40 40		40	8	10	60-70pcs	100
L-UD 40 50		50	8	10	50-70pcs	80
L-UD 40 60		60	8	10	100-115pcs	64
L-UD 40 80		80	8	10	120-135pcs	48
L UD 50 25	50	25	8	10	20-35pcs	100
L-UD 50 35		35	8	10	40-60pcs	100
L-UD 50 50		50	8	10	80-90pcs	80
L-UD 50 80		80	8	10	160-180pcs	48
L-UD 60 25	60	25	8	10	40-55pcs	80
L-UD 60 30		30	8	10	40-65pcs	80
L-UD 60 40		40	8	10	100-115pcs	46
L-UD 60 60		60	8	10	120-135pcs	48
L-UD 60 80		80	8	10	180-210pcs	36
L-UD 60 100		100	8	10	230-250pcs	32
L-UD 60 120		120	8	10	260-350pcs	24
L-UD 80 25	80	25	8	10	100-120pcs	60
L-UD 80 30		30	8	10	105-125pcs	60
L-UD 80 35		35	8	10	110-130pcs	60
L-UD 80 40		40	8	10	140-160pcs	48
L-UD 80 45		45	8	10	140-165pcs	48
L-UD 80 50		50	8	10	160-180pcs	48
L-UD 80 60		60	8	10	180-210pcs	36
L-UD 80 80		80	8	10	240-290pcs	36
L-UD 80 100		100	8	10	260-350pcs	24
L-UD 80 120		120	8	10	280-380pcs	24
L-UD 100 30	100	30	10	10	130-160pcs	48
L-UD 100 33		33	10	10	130-165pcs	48
L-UD 100 40		40	10	10	130-175pcs	48
L-UD 100 50		50	10	10	220-250pcs	48
L-UD 100 60		60	10	10	240-290pcs	32
L-UD 100 75		75	10	10	260-350pcs	24
L-UD 100 80		80	10	10	260-360pcs	24
L-UD 100 100		100	10	10	300-400pcs	24

Latest Information from our website

L-VD

LSZH wiring duct

(Narrow sliver, Opened slot)



Wiring Duct

Description

Material

PC+ABS, LSZH, RoHs compliant, Insulating, flame retardant, high stability.

Flame retardancy

UL94V-0, Non-flame propagator.

Construction

1. Consist of base and cover, Easy and firm snap-on assembly, smooth joining for a better finish.
2. With aligned slot, Smooth corners and edges will not damage or disfigure wires.
3. All sizes and diverse slots and bottom hole design, easy for Cable arrangement and disassembly.
4. Special marking line design on the cover can allow a quick tag of relevant components.

Certification


EN45545, Q/CR699, QCRRCJ26, TB/T3139.

Color

Grey RAL 7035 (Special color can be customized)

Working temperature

-40°C~90°C

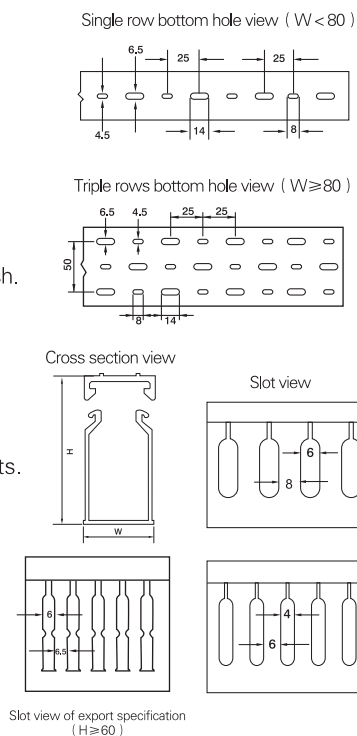

L-VD LSZH wiring duct (Narrow sliver, Opened slot)

Specification	Size (mm)		Slot Width mm	Sliver Width mm	Wire capacity 2.0mm ² /pcs	Packing M
	H	W				
L-VD 25 25	25	25	6	6.5	10-25pcs	100
L-VD 35 35	35	35	4	6	20-25pcs	100
L-VD 40 25	40	25	4	6	20-25pcs	100
L-VD 40 30		30	4	6	35-40pcs	100
L-VD 40 40		40	4	6	60-70pcs	100
L-VD 40 50		50	4	6	50-70pcs	80
L-VD 40 60		60	4	6	100-115pcs	64
L-VD 40 80		80	4	6	120-135pcs	48
L-VD 50 25	50	25	4	6	20-35pcs	100
L-VD 50 35		35	4	6	40-60pcs	100
L-VD 50 50		50	4	6	80-90pcs	80
L-VD 50 80		80	4	6	160-180pcs	48
L-VD 60 25	60	25	4	6	40-55pcs	80
L-VD 60 30		30	4	6	40-65pcs	80
L-VD 60 40		40	4	6	100-115pcs	64
L-VD 60 60		60	4	6	120-135pcs	48
L-VD 60 80		80	4	6	180-210pcs	36
L-VD 60 100		100	4	6	230-250pcs	32
L-VD 60 120	80	120	4	6	260-350pcs	24
L-VD 80 25		25	4	6	100-120pcs	60
L-VD 80 30		30	4	6	105-125pcs	60
L-VD 80 35		35	4	6	110-130pcs	60
L-VD 80 40		40	4	6	140-160pcs	48
L-VD 80 45		45	4	6	140-165pcs	48
L-VD 80 50		50	4	6	160-180pcs	48
L-VD 80 60		60	4	6	180-210pcs	36
L-VD 80 80		80	4	6	240-290pcs	36
L-VD 80 100		100	4	6	260-350pcs	24
L-VD 80 120		120	4	6	280-380pcs	24
L-VD 100 30	100	30	6	8	130-160pcs	48
L-VD 100 33		33	6	8	130-165pcs	48
L-VD 100 40		40	6	8	130-175pcs	48
L-VD 100 50		50	6	8	220-250pcs	48
L-VD 100 60		60	6	8	240-290pcs	32
L-VD 100 75		75	6	8	260-350pcs	24
L-VD 100 80		80	6	8	260-360pcs	24
L-VD 100 100		100	6	8	300-400pcs	24

Latest Information from our website

g duct
slot)

Wiring Duct

Wiring Duct

Description

■ **Material**

PC+ABS,LSZH, RoHs compliant, Insulating, flame retardant, high stability.

■ Certification

EN45545, Q/CR699, QCRRCJ26, TB/T3139.

■ Flame retardancy

UL94V-0, Non-flame propagator.

■ Construction



1. Consist of base and cover, Easy and firm snap—on assembly, smooth joining for a better finish.
2. With aligned slot, Smooth corners and edges will not damage or disfigure wires.
3. All sizes and diverse slots and bottom hole design, easy for Cable arrangement and disassembly.
4. Special marking line design on the cover can allow a quick tag of relevant components.

■ **Color**


Grey RAL 7035 (Special color can be customized)

- Working temperature


-40°C~90°C

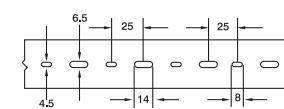



Triple rows bottom hole view ($W \geq 80$)

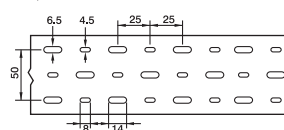

Cross section view



Slot view



L-OD LSZH_{wiring} duct (Wide sliver, Closed slot)



Specification	Size (mm)		Slot Width mm	Sliver Width mm	Wire capacity 2.0mm² /pcs	Packing M
	H	W				
L-OD 60 25	60	25	8	10	40-55pcs	80
L-OD 60 30		30	8	10	50-65pcs	80
L-OD 60 40		40	8	10	100-115pcs	64
L-OD 60 60		60	8	10	120-135pcs	48
L-OD 60 80		80	8	10	180-210pcs	36
L-OD 60 100		100	8	10	230-250pcs	32
L-OD 60 120		120	8	10	260-350pcs	24
L-OD 80 25	80	25	8	10	100-120pcs	60
L-OD 80 30		30	8	10	105-125pcs	60
L-OD 80 35		35	8	10	110-130pcs	60
L-OD 80 40		40	8	10	140-160pcs	48
L-OD 80 45		45	8	10	140-165pcs	48
L-OD 80 50		50	8	10	160-180pcs	48
L-OD 80 60		60	8	10	180-210pcs	36
L-OD 80 80		80	8	10	240-290pcs	36
L-OD 80 100		100	8	10	260-350pcs	24
L-OD 80 120		120	8	10	280-380pcs	24
L-OD 100 30	100	30	10	10	130-160pcs	48
L-OD 100 33		33	10	10	130-165pcs	48
L-OD 100 40		40	10	10	220-250pcs	48
L-OD 100 50		50	10	10	240-290pcs	48
L-OD 100 60		60	10	10	260-350pcs	32
L-OD 100 75		75	10	10	260-360pcs	24
L-OD 100 80		80	10	10	265-365pcs	24
L-OD 100 100		100	10	10	300-400pcs	24

Latest Information from our website

L-MD
LSZH wiring duct
(Solid)




Wiring Duct

Description

- **Material**
PC+ABS, LSZH, RoHs compliant, Insulating, flame retardant, high stability.
- **Flame retardancy**
UL94V-0, Non-flame propagator.
- **Certification**
EN45545, Q/CR699, QCRRCJ26, TB/T3139.
- **Construction**
1.Consist of base and cover, Easy and firm snap-on assembly, smooth joining for a better finish.

2. Special marking line design on the cover can allow a quick tag of relevant components.
- **Color**
Grey RAL 7035 (Special color can be customized)
- **Working temperature**
-40℃~90℃

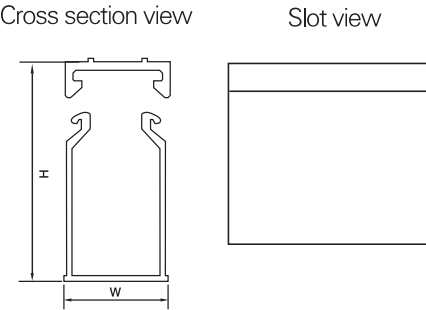

L-MD LSZHwiring duct (Solid)

Specification	Size (mm)		Wire capacity 2.0mm² /pcs	Packing M
	H	W		
L-MD 25 25	25	25	10-25pcs	100
L-MD 35 35	35	35	20-25pcs	100
L-MD 40 25	40	25	20-25pcs	100
L-MD 40 30		30	35-40pcs	100
L-MD 40 40		40	60-70pcs	100
L-MD 40 50		50	50-70pcs	80
L-MD 40 60		60	100-115pcs	64
L-MD 40 80		80	120-135pcs	48
L-MD 50 25	50	25	20-35pcs	100
L-MD 50 35		35	40-60pcs	100
L-MD 50 50		50	80-90pcs	80
L-MD 50 80		80	160-180pcs	48
L-MD 60 25	60	25	40-55pcs	80
L-MD 60 30		30	50-65pcs	80
L-MD 60 40		40	100-115pcs	64
L-MD 60 60		60	120-135pcs	48
L-MD 60 80		80	180-210pcs	36
L-MD 60 100		100	230-250pcs	32
L-MD 60 120		120	260-350pcs	24
L-MD 80 25	80	25	100-120pcs	60
L-MD 80 30		30	105-125pcs	60
L-MD 80 35		35	110-130pcs	60
L-MD 80 40		40	140-160pcs	48
L-MD 80 45		45	140-165pcs	48
L-MD 80 50		50	160-180pcs	48
L-MD 80 60		60	180-210pcs	36
L-MD 80 80		80	240-290pcs	36
L-MD 80 100		100	260-350pcs	24
L-MD 80 120		120	280-380pcs	24
L-MD 100 30	100	30	130-160pcs	48
L-MD 100 33		33	130-165pcs	48
L-MD 100 40		40	220-250pcs	48
L-MD 100 50		50	240-290pcs	48
L-MD 100 60		60	260-350pcs	32
L-MD 100 75		75	260-360pcs	24
L-MD 100 80		80	265-365pcs	24
L-MD 100 100		100	300-400pcs	24

Latest Information from our website



YIFENG NEW MATERIALS



SWD International standard flame retardant Eco-wiring duct

Manufactured with high quality rigid PVC, ROHS compliant, Asbestos free.

- SWD Eco-wiring duct (Wide sliver, Opened slot)
- SWD Eco-wiring duct (Narrow sliver, Opened slot)
- SWD Eco-wiring duct (Wide sliver, Closed slot)
- MD solid wiring duct




SWD
Eco-wiring duct
(Wide sliver, Opened slot)



Wiring Duct

Description

- **Material**
Manufactured with high quality rigid PVC, ROHS compliant, Asbestos free.
- **Flame retardancy**
UL94 Flammability Rating of V-0, inflaming retarding material with good self extinguishing ability.
- **Construction**
 - 1.Consist of base and cover, Easy and firm snap-on assembly, smooth joining for a better finish.
 2. With aligned slot, Smooth corners and edges will not damage or disfigure wires.
 3. All sizes and diverse slots and bottom hole design, easy for Cable arrangement and disassembly.
 4. Special marking line design on the cover can allow a quick tag of relevant components.
 5. The line design on the bottom edge of the trunking,Easy operating, Keep the wiring nice and tidy.
- **Color**
Grey RAL 7004 (White. Blue.and Black colors can be customized)
- **Working temperature**
-20℃~65℃

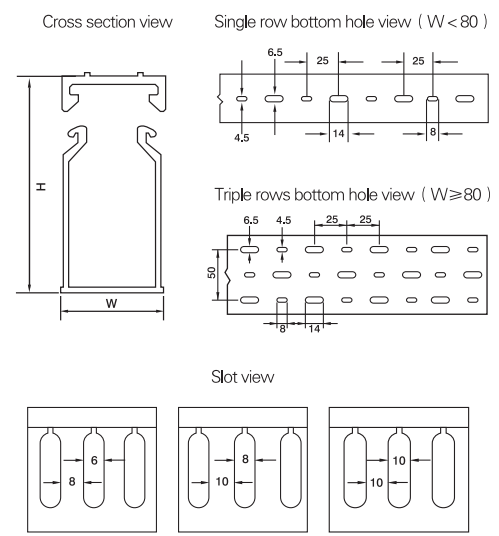

SWD wiring duct (Wide sliver, Opened slot)



Specification	Size (mm)		Slot Width mm	Sliver Width mm	Wire capacity 2.0mm² /pcs	Packing M
	H	W				
SWD 40 25	40	25	6	8	20-25pcs	100
SWD 40 30		30	6	8	35-40pcs	100
SWD 40 40		40	6	8	60-70pcs	100
SWD 40 50		50	6	8	50-70pcs	100
SWD 40 60		60	6	8	100-115pcs	64
SWD 40 80		80	6	8	120-135pcs	48
SWD 45 33	45	33	6	8	40-55pcs	100
SWD 45 45		45	6	8	60-70pcs	80
SWD 50 25	50	25	6	8	20-25pcs	100
SWD 50 35		35	6	8	40-60pcs	100
SWD 50 45		45	6	8	70-80pcs	80
SWD 50 50		50	6	8	80-90pcs	80
SWD 50 55		55	6	8	90-100pcs	60
SWD 50 60		60	6	8	100-120pcs	48
SWD 50 80		80	6	8	160-180pcs	48
SWD 60 25	60	25	8	10	40-45pcs	80
SWD 60 30		30	8	10	40-50pcs	80
SWD 60 40		40	8	10	100-115pcs	64
SWD 60 50		50	8	10	100-120pcs	60
SWD 60 55		55	8	10	115-125pcs	60
SWD 60 60		60	8	10	120-135pcs	48
SWD 60 80		80	8	10	180-210pcs	36
SWD 60 100		100	8	10	240-290pcs	32
SWD 65 33	65	33	8	10	40-75pcs	80
SWD 65 45		45	8	10	110-120pcs	80
SWD 65 65		65	8	10	180-200pcs	48
SWD 80 25	80	25	8	10	100-120pcs	60
SWD 80 30		30	8	10	105-125pcs	60
SWD 80 35		35	8	10	110-130pcs	60
SWD 80 40		40	8	10	140-160pcs	48
SWD 80 45		45	8	10	140-165pcs	48
SWD 80 50		50	8	10	160-180pcs	48
SWD 80 60		60	8	10	180-210pcs	36
SWD 80 80		80	8	10	240-290pcs	36
SWD 80 100		100	8	10	260-350pcs	24
SWD 80 120		120	8	10	280-380pcs	24
SWD 100 25	100	25	10	10	120-150pcs	48
SWD 100 30		30	10	10	130-165pcs	48
SWD 100 33		33	10	10	130-165pcs	48
SWD 100 35		35	10	10	130-165pcs	48
SWD 100 40		40	10	10	130-175pcs	48
SWD 100 50		50	10	10	220-250pcs	48
SWD 100 60		60	10	10	240-290pcs	32
SWD 100 80		80	10	10	260-350pcs	24
SWD 100 100		100	10	10	300-400pcs	24
SWD 100 120		120	10	10	380-480pcs	24
SWD 100 140		140	10	10	430-620pcs	16
SWD 130 100	130	100	10	10	420-600pcs	16
SWD 140 35	140	35	8	10	120-165pcs	48
SWD 150 100	150	100	10	10	450-650pcs	16

SWD

Eco-wiring duct

(Narrow sliver, Opened slot)



Wiring Duct

Description

Material

Manufactured with high quality rigid PVC, ROHS compliant, Asbestos free.

Flame retardancy

UL94 Flammability Rating of V-0, inflaming retarding material with good self extinguishing ability.

Construction

1. Consist of base and cover, Easy and firm snap-on assembly, smooth joining for a better finish.
2. With aligned slot, Smooth corners and edges will not damage or disfigure wires.
3. All sizes and diverse slots and bottom hole design, easy for Cable arrangement and disassembly.
4. Special marking line design on the cover can allow a quick tag of relevant components.
5. The line design on the bottom edge of the trunking, Easy operating, Keep the wiring nice and tidy.


Color

Grey RAL 7004 (White. Blue. and Black colors can be customized)


Working temperature

-20°C~65°C


Cross section view

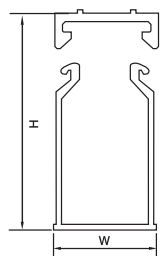


Single row bottom hole view (W < 80)

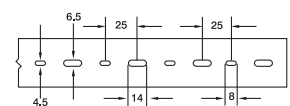

Triple rows bottom hole view (W ≥ 80)

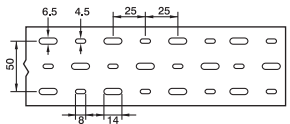

Slot view

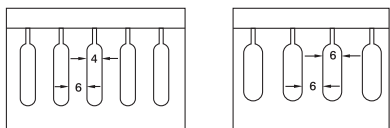

SWD wiring duct (Narrow sliver, Opened slot)

Specification	Size (mm)		Slot Width mm	Sliver Width mm	Wire capacity 2.0mm ² /pcs	Packing M
	H	W				
SWD 25 25	25	25	4	6	10-25pcs	100
SWD 30 20	30	20	4	6	15-25pcs	100
SWD 30 25		25	4	6	15-25pcs	100
SWD 30 30		30	4	6	30-40pcs	100
SWD 30 35		35	4	6	30-45pcs	100
SWD 35 25	35	25	4	6	15-20pcs	100
SWD 35 35		35	4	6	35-50pcs	100
SWD 35 50		50	4	6	40-60pcs	100
SWD 40 25		25	4	6	20-25pcs	100
SWD 40 30	40	30	4	6	35-40pcs	100
SWD 40 40		40	4	6	60-70pcs	100
SWD 40 50		50	4	6	50-70pcs	100
SWD 40 60		60	4	6	100-115pcs	64
SWD 40 80		80	4	6	120-135pcs	48
SWD 45 33	45	33	4	6	40-55pcs	100
SWD 45 45		45	4	6	60-70pcs	80
SWD 50 25	50	25	4	6	20-25pcs	100
SWD 50 35		35	4	6	40-60pcs	100
SWD 50 40		40	4	6	45-75pcs	80
SWD 50 45		45	4	6	70-80pcs	80
SWD 50 50		50	4	6	80-90pcs	80
SWD 50 55		55	4	6	90-100pcs	60
SWD 50 60		60	4	6	100-120pcs	48
SWD 50 80		80	4	6	160-180pcs	48
SWD 60 25	60	25	4	6	40-45pcs	80
SWD 60 30		30	4	6	40-50pcs	80
SWD 60 40		40	4	6	100-115pcs	64
SWD 60 50		50	4	6	100-120pcs	60
SWD 60 55		55	4	6	115-125pcs	60
SWD 60 60		60	4	6	120-135pcs	48
SWD 60 80		80	4	6	180-210pcs	36
SWD 60 100		100	4	6	240-290pcs	32
SWD 65 33	65	33	4	6	40-75pcs	80
SWD 65 45		45	4	6	110-120pcs	80
SWD 65 65	80	65	4	6	180-200pcs	48
SWD 80 25		25	4	6	100-120pcs	60
SWD 80 30		30	4	6	105-125pcs	60
SWD 80 35		35	4	6	110-130pcs	60
SWD 80 40		40	4	6	140-160pcs	48
SWD 80 45		45	4	6	140-165pcs	48
SWD 80 50		50	4	6	160-180pcs	48
SWD 80 60		60	4	6	180-210pcs	36
SWD 80 80	100	80	4	6	240-290pcs	36
SWD 80 100		100	4	6	260-350pcs	24
SWD 80 120		120	4	6	280-380pcs	24
SWD 100 25		25	6	6	120-150pcs	48
SWD 100 30		30	6	6	130-165pcs	48
SWD 100 33		33	6	6	130-165pcs	48
SWD 100 35		35	6	6	130-165pcs	48
SWD 100 40		40	6	6	130-175pcs	48
SWD 100 50	100	50	6	6	220-250pcs	48
SWD 100 60		60	6	6	240-290pcs	32
SWD 100 80		80	6	6	260-350pcs	24
SWD 100 100		100	6	6	300-400pcs	24
SWD 100 120		120	6	6	380-480pcs	24
SWD 100 140		140	6	6	430-620pcs	16

SWD

Eco-wiring duct

(Wide sliver, Closed slot)



Wiring Duct

Description

Material

Manufactured with high quality rigid PVC, ROHS compliant, Asbestos free.

Flame retardancy

UL94 Flammability Rating of V-0, inflaming retarding material with good self extinguishing ability.

Construction


1. Consist of base and cover, Easy and firm snap-on assembly, smooth joining for a better finish.
2. With aligned slot, Smooth corners and edges will not damage or disfigure wires.
3. All sizes and diverse slots and bottom hole design, easy for Cable arrangement and disassembly.
4. Special marking line design on the cover can allow a quick tag of relevant components.

Working temperature

-20°C~65°C

Color

Grey RAL 7004 (White Blue and Black colors can be customized)

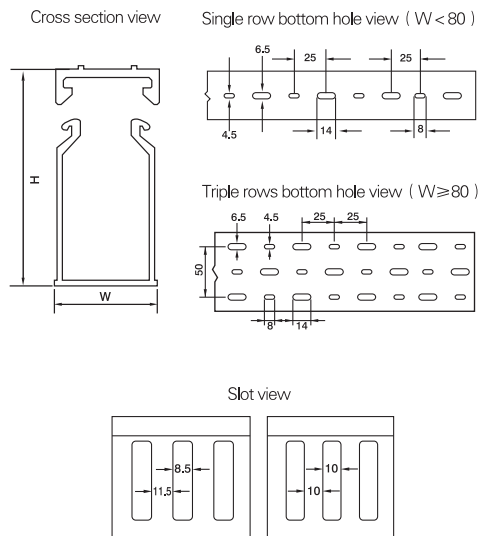

SWD wiring duct (Wide sliver, Closed slot)

Specification	Size (mm)		Slot Width mm	Sliver Width mm	Wire capacity 2.0mm ² /pcs	Packing M
	H	W				
SWD 40 25	40	25	8.5	11.5	20-25pcs	100
SWD 40 30		30	8.5	11.5	35-40pcs	100
SWD 40 40		40	8.5	11.5	60-70pcs	100
SWD 40 50		50	8.5	11.5	50-70pcs	100
SWD 40 60		60	8.5	11.5	100-115pcs	64
SWD 40 80		80	8.5	11.5	140-160pcs	48
SWD 50 25	50	25	10	10	20-25pcs	100
SWD 50 35		35	10	10	40-60pcs	100
SWD 50 45		45	10	10	70-80pcs	80
SWD 50 50		50	10	10	80-90pcs	80
SWD 50 55		55	10	10	90-100pcs	60
SWD 50 60		60	10	10	100-120pcs	48
SWD 50 80		80	10	10	160-180pcs	48
SWD 60 25	60	25	8.5	11.5	40-45pcs	80
SWD 60 30		30	8.5	11.5	40-50pcs	80
SWD 60 40		40	8.5	11.5	100-115pcs	64
SWD 60 50		50	8.5	11.5	100-120pcs	60
SWD 60 55		55	8.5	11.5	115-125pcs	60
SWD 60 60		60	8.5	11.5	120-135pcs	48
SWD 60 80		80	8.5	11.5	180-210pcs	36
SWD 60 100		100	8.5	11.5	240-290pcs	32
SWD 80 25	80	25	10	10	100-120pcs	60
SWD 80 30		30	10	10	105-125pcs	60
SWD 80 35		35	10	10	110-130pcs	60
SWD 80 40		40	10	10	140-160pcs	48
SWD 80 45		45	10	10	140-165pcs	48
SWD 80 50		50	10	10	160-180pcs	48
SWD 80 60		60	10	10	180-210pcs	36
SWD 80 80		80	10	10	240-290pcs	36
SWD 80 100		100	10	10	260-350pcs	24
SWD 80 120		120	10	10	280-380pcs	24
SWD 100 25	100	25	10	10	120-150pcs	48
SWD 100 30		30	10	10	130-165pcs	48
SWD 100 35		35	10	10	130-165pcs	48
SWD 100 40		40	10	10	130-175pcs	48
SWD 100 50		50	10	10	220-250pcs	48
SWD 100 60		60	10	10	240-290pcs	32
SWD 100 80		80	10	10	260-350pcs	24
SWD 100 100		100	10	10	300-400pcs	24
SWD 100 120		120	10	10	380-480pcs	24
SWD 100 140		140	10	10	430-620pcs	16

Latest Information from our website

SWD solid wiring duct

Wiring Duct

Description


- **Material**
Manufactured with high quality rigid PVC, ROHS compliant, Asbestos free.

- **Flame retardancy**
UL94 Flammability Rating of V-0, inflaming retarding material with good self extinguishing ability.

- **Construction**
 - 1.Consist of base and cover, Easy and firm snap-on assembly, smooth joining for a better finish.
 - 2.Special marking line design on the cover can allow a quick tag of relevant components.

- **Color**
GreyRAL 7004(White. Blue.and Black colors can be customized)

- **Working temperature**
-20℃~65℃

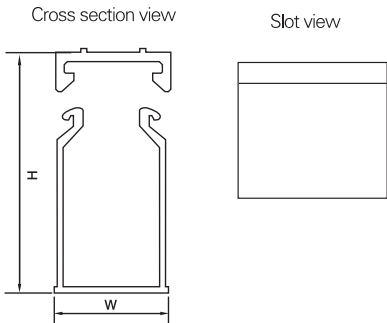

MD solid wiring duct

Specification	Size (mm)		Wire capacity 2.0mm² /pcs	Packing
	H	W		
MD 25 25	25	25	10-25pcs	100
MD 30 15	30	15	15-20pcs	100
MD 30 20		20	15-25pcs	100
MD 30 25		25	15-25pcs	100
MD 30 30		30	30-40pcs	100
MD 30 35		35	30-45pcs	100
MD 35 25	35	25	15-20pcs	100
MD 35 35		35	35-50pcs	100
MD 35 50		50	40-60pcs	100
MD 40 25	40	25	20-25pcs	100
MD 40 30		30	35-40pcs	100
MD 40 40		40	60-70pcs	100
MD 40 50		50	50-70pcs	100
MD 40 60		60	100-115pcs	64
MD 40 80	45	80	140-160pcs	48
MD 45 33		33	40-55pcs	100
MD 45 45		45	60-70pcs	80
MD 50 25	50	25	20-25pcs	100
MD 50 35		35	40-60pcs	100
MD 50 45		45	70-80pcs	80
MD 50 50		50	80-90pcs	80
MD 50 55		55	90-100pcs	60
MD 50 60		60	100-120pcs	48
MD 50 80		80	160-180pcs	48
MD 60 25	60	25	40-45pcs	80
MD 60 30		30	40-50pcs	80
MD 60 40		40	100-115pcs	64
MD 60 50		50	100-120pcs	60
MD 60 55		55	115-125pcs	60
MD 60 60		60	120-135pcs	48
MD 60 80		80	180-210pcs	36
MD 60 100		100	240-290pcs	32
MD 65 33	65	33	40-75pcs	80
MD 65 45		45	110-120pcs	80
MD 65 65		65	180-200pcs	48
MD 80 25	80	25	100-120pcs	60
MD 80 30		30	105-125pcs	60
MD 80 35		35	110-130pcs	60
MD 80 40		40	140-160pcs	48
MD 80 45		45	140-165pcs	48
MD 80 50		50	160-180pcs	48
MD 80 60		60	180-210pcs	36
MD 80 80		80	240-290pcs	36
MD 80 100		100	260-350pcs	24
MD 80 120		120	280-380pcs	24
MD 100 25	100	25	120-150pcs	48
MD 100 30		30	130-165pcs	48
MD 100 33		33	130-165pcs	48
MD 100 35		35	130-165pcs	48
MD 100 40		40	130-175pcs	48
MD 100 50		50	220-250pcs	48
MD 100 60		60	240-290pcs	32
MD 100 80		80	260-350pcs	24
MD 100 100		100	300-400pcs	24
MD 100 120		120	380-480pcs	24
MD 100 140	130	140	430-620pcs	16
MD 130 100		100	420-600pcs	16
MD 140 35	140	35	220-300pcs	48
MD 150 100	150	100	450-650pcs	16



YIFENG NEW MATERIALS



UL flame retardant Eco-wiring duct

Manufactured with High quality rigid PVC, RoHS compliant,
Using Elastic polymer anti-slip material in the inner side of the cover.

N-UD anti-slip UL wiring duct (Wide sliver, Opened slot)

N-VD Anti-slip UL wiring duct (Narrow sliver, Opened slot)

N-OFD Anti-slip UL wiring duct (Wide sliver, Closed slot)

N-UFD Double Separated Anti-slip UL wiring duct (Wide sliver, Opened slot)

N-VFD Double Separated Anti-slip UL wiring duct (Narrow sliver, Opened slot)

N-MD Anti-slip UL wiring duct (solid)



N-UD

Anti-slip UL wiring duct

(Wide sliver,Opened slot)



Description


Material
Manufactured with High quality rigid PVC, RoHS compliant. Using Elastic polymer anti-slip material in the inner side of the cover.

Flame retardancy
UL94V-0, inflaming retarding material with good self extinguishing ability.

- Construction**
- 1.If the width is over 40mm, the inner side of the cover will have the co-extruded anti-slip design, which make it easy to install and hard to fall apart at any angle (except for 45 width).
 - 2.Diverse bottom hole design, make it easy to install. Circle slot which is suitable for cable arrangement and make the section looks tidy.

Color
Grey RAL7030 (White. Blue.and Black colors can be customized).

Working temperature
-20℃~65℃

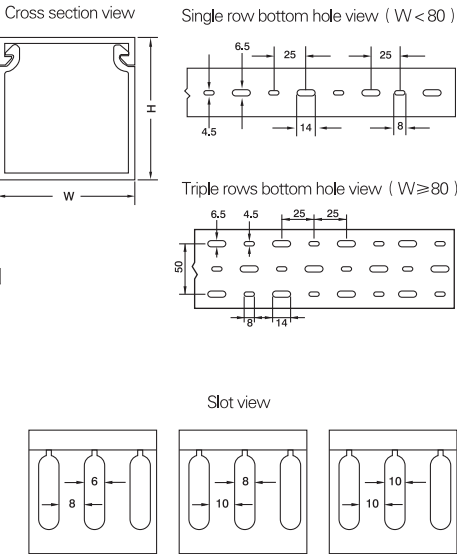

N-UD

wiring duct (Wide sliver,Opened slot)



Specification	Size (mm)		Slot Width mm	Sliver Width mm	Wire capacity 2.0mm² /pcs	Packing M
	H	W				
N-UD 40 25	40	25	6	8	20-25pcs	100
N-UD 40 30		30	6	8	35-40pcs	100
N-UD 40 40		40	6	8	60-70pcs	100
N-UD 40 50		50	6	8	50-70pcs	80
N-UD 40 60		60	6	8	100-115pcs	64
N-UD 40 80	45	80	6	8	140-160pcs	48
N-UD 45 33		33	6	8	40-55pcs	100
N-UD 45 45	50	45	6	8	60-70pcs	80
N-UD 50 25		25	6	8	20-25pcs	100
N-UD 50 35		35	6	8	40-60pcs	100
N-UD 50 45		45	6	8	70-80pcs	80
N-UD 50 50		50	6	8	80-90pcs	80
N-UD 50 60		60	6	8	100-120pcs	48
N-UD 50 80		80	6	8	160-180pcs	48
N-UD 60 25	60	25	8	10	40-45pcs	80
N-UD 60 30		30	8	10	40-50pcs	80
N-UD 60 40		40	8	10	100-115pcs	64
N-UD 60 50		50	8	10	100-120pcs	60
N-UD 60 60		60	8	10	120-135pcs	48
N-UD 60 80		80	8	10	180-210pcs	36
N-UD 60 100		100	8	10	240-290pcs	32
N-UD 65 33	65	33	8	10	40-75pcs	80
N-UD 65 45		45	8	10	110-120pcs	80
N-UD 65 65		65	8	10	180-200pcs	48
N-UD 80 25	80	25	8	10	100-120pcs	60
N-UD 80 30		30	8	10	100-125pcs	60
N-UD 80 35		35	8	10	110-130pcs	60
N-UD 80 40		40	8	10	140-160pcs	48
N-UD 80 45		45	8	10	140-165pcs	48
N-UD 80 50		50	8	10	160-180pcs	48
N-UD 80 60		60	8	10	180-210pcs	36
N-UD 80 80		80	8	10	240-290pcs	36
N-UD 80 100		100	8	10	260-350pcs	24
N-UD 80 120		120	8	10	280-380pcs	24
N-UD 100 30	100	30	10	10	130-165pcs	48
N-UD 100 33		33	10	10	130-165pcs	48
N-UD 100 35		35	10	10	130-165pcs	48
N-UD 100 40		40	10	10	130-175pcs	48
N-UD 100 50		50	10	10	220-250pcs	48
N-UD 100 60		60	10	10	240-290pcs	32
N-UD 100 80		80	10	10	260-350pcs	24
N-UD 100 100		100	10	10	300-400pcs	24
N-UD 100 120		120	10	10	380-480pcs	24
N-UD 130 100	130	100	10	10	420-600pcs	16
N-UD 140 35	140	35	10	10	230-300pcs	48
N-UD 150 100	150	100	10	10	450-650pcs	16

Latest Information from our website

N-VD

Anti-slip UL wiring duct

(Narrow sliver, Opened slot)



Description


Material
Manufactured with High quality rigid PVC, RoHS compliant. Using Elastic polymer anti-slip material in the inner side of the cover.

Flame retardancy
UL94V-0, inflaming retarding material with good self extinguishing ability.

Construction
1.If the width is over 40mm, the inner side of the cover will have the co-extruded anti-slip design, which make it easy to install and hard to fall apart at any angle (except for 45 width).
2.Diverse bottom hole design, make it easy to install. Circle slot which is suitable for cable arrangement and make the section looks tidy.

Color
Grey RAL7030 (White. Blue.and Black colors can be customized).

Working temperature
-20℃~65℃

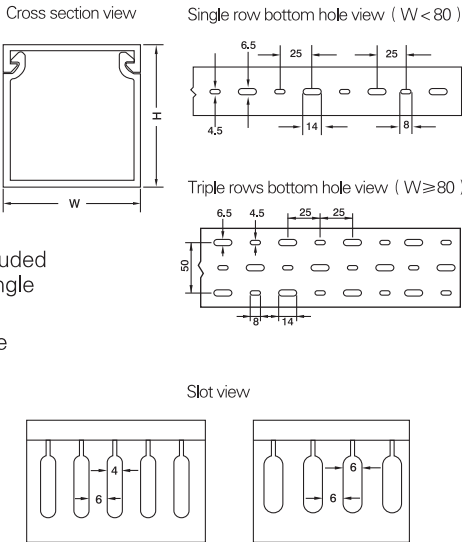

N-VD wiring duct (Narrow sliver, Opened slot)

Specification	Size (mm)		Slot Width mm	Sliver Width mm	Wire capacity 2.0mm² /pcs	Packing M
	H	W				
N-VD 25 25	25	25	4	6	10-25pcs	100
N-VD 30 20	30	20	4	6	15-25pcs	100
N-VD 30 25		25	4	6	15-25pcs	100
N-VD 35 35	35	35	4	6	35-50pcs	100
N-VD 40 25	40	25	4	6	20-25pcs	100
N-VD 40 30		30	4	6	35-40pcs	100
N-VD 40 40		40	4	6	60-70pcs	100
N-VD 40 50		50	4	6	50-70pcs	80
N-VD 40 60		60	4	6	100-115pcs	64
N-VD 40 80		80	4	6	140-160pcs	48
N-VD 45 33	45	33	4	6	40-55pcs	100
N-VD 45 45		45	4	6	60-70pcs	80
N-VD 50 25	50	25	4	6	20-25pcs	100
N-VD 50 35		35	4	6	40-60pcs	100
N-VD 50 45		45	4	6	70-80pcs	80
N-VD 50 50		50	4	6	80-90pcs	80
N-VD 50 60		60	4	6	100-120pcs	48
N-VD 50 80		80	4	6	160-180pcs	48
N-VD 60 25	60	25	4	6	40-45pcs	80
N-VD 60 30		30	4	6	40-50pcs	80
N-VD 60 40		40	4	6	100-115pcs	64
N-VD 60 50		50	4	6	100-120pcs	60
N-VD 60 60		60	4	6	120-135pcs	48
N-VD 60 80		80	4	6	180-210pcs	36
N-VD 60 100		100	4	6	240-290pcs	32
N-VD 65 33	65	33	4	6	40-75pcs	80
N-VD 65 45		45	4	6	110-120pcs	80
N-VD 65 65		65	4	6	180-200pcs	48
N-VD 80 25	80	25	4	6	100-120pcs	60
N-VD 80 30		30	4	6	100-125pcs	60
N-VD 80 35		35	4	6	110-130pcs	60
N-VD 80 40		40	4	6	140-160pcs	48
N-VD 80 45		45	4	6	140-165pcs	48
N-VD 80 50		50	4	6	160-180pcs	48
N-VD 80 60		60	4	6	180-210pcs	36
N-VD 80 80		80	4	6	240-290pcs	36
N-VD 80 100		100	4	6	260-350pcs	24
N-VD 80 120		120	4	6	280-380pcs	24
N-VD 100 25	100	25	6	6	120-150pcs	48
N-VD 100 30		30	6	6	130-165pcs	48
N-VD 100 33		33	6	6	130-165pcs	48
N-VD 100 35		35	6	6	130-165pcs	48
N-VD 100 40		40	6	6	130-175pcs	48
N-VD 100 50		50	6	6	220-250pcs	48
N-VD 100 60		60	6	6	240-290pcs	32
N-VD 100 80		80	6	6	260-350pcs	24
N-VD 100 100		100	6	6	300-400pcs	24
N-VD 100 120		120	6	6	380-480pcs	24

Latest Information from our website

N-OD

Anti-slip UL wiring duct

(Wide sliver, Closed slot)




Description


- Material
- Manufactured with High quality rigid PVC, RoHS compliant. Using Elastic polymer anti-slip material in the inner side of the cover.
- Flame retardancy
- UL94V-0, inflaming retarding material with good self extinguishing ability.
- Construction
1. If the width is over 40mm, the inner side of the cover will have the co-extruded anti-slip design, which make it easy to install and hard to fall apart at any angle (except for 45 width).

2. Diverse bottom hole design, make it easy to install. square slot which is suitable for cable arrangement and make the section looks tidy.
- Color
- Grey RAL7030 (White. Blue.and Black colors can be customized).
- Working temperature
- 20℃~65℃


Cross section view




Slot view



Single row bottom hole view (W < 80)

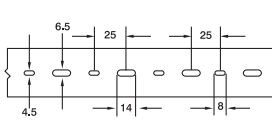

Triple rows bottom hole view (W ≥ 80)

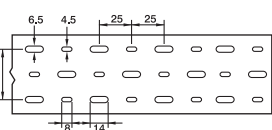

N-OD wiring duct (Wide sliver, Closed slot)

Specification	Size (mm)		Slot Width mm	Sliver Width mm	Wire capacity 2.0mm ² /pcs	Packing M
	H	W				
N-OD 40 25	40	25	8.5	11.5	20-25pcs	100
N-OD 40 30		30	8.5	11.5	35-40pcs	100
N-OD 40 40		40	8.5	11.5	60-70pcs	100
N-OD 40 50		50	8.5	11.5	50-70pcs	80
N-OD 40 60		60	8.5	11.5	100-115pcs	64
N-OD 40 80		80	8.5	11.5	140-160pcs	48
N-OD 50 25	50	25	10	10	20-25pcs	100
N-OD 50 35		35	10	10	40-60pcs	100
N-OD 50 45		45	10	10	70-80pcs	80
N-OD 50 50		50	10	10	80-90pcs	80
N-OD 50 60		60	10	10	100-120pcs	48
N-OD 50 80		80	10	10	160-180pcs	48
N-OD 60 25	60	25	8.5	11.5	40-45pcs	80
N-OD 60 30		30	8.5	11.5	40-50pcs	80
N-OD 60 40		40	8.5	11.5	100-115pcs	64
N-OD 60 50		50	8.5	11.5	100-120pcs	60
N-OD 60 60		60	8.5	11.5	120-135pcs	48
N-OD 60 80		80	8.5	11.5	180-210pcs	36
N-OD 60 100		100	8.5	11.5	240-290pcs	32
N-OD 80 25	80	25	10	10	100-120pcs	60
N-OD 80 30		30	10	10	100-125pcs	60
N-OD 80 35		35	10	10	110-130pcs	60
N-OD 80 40		40	10	10	140-160pcs	48
N-OD 80 45		45	10	10	140-165pcs	48
N-OD 80 50		50	10	10	160-180pcs	48
N-OD 80 60		60	10	10	180-210pcs	36
N-OD 80 80		80	10	10	240-290pcs	36
N-OD 80 100		100	10	10	260-350pcs	24
N-OD 80 120		120	10	10	280-380pcs	24
N-OD 100 25	100	25	10	10	120-150pcs	48
N-OD 100 30		30	10	10	130-165pcs	48
N-OD 100 33		33	10	10	130-165pcs	48
N-OD 100 35		35	10	10	130-165pcs	48
N-OD 100 40		40	10	10	130-175pcs	48
N-OD 100 50		50	10	10	220-250pcs	48
N-OD 100 60		60	10	10	240-290pcs	32
N-OD 100 80		80	10	10	260-350pcs	24
N-OD 100 100		100	10	10	300-400pcs	24
N-OD 100 120		120	10	10	380-480pcs	24

Latest Information from our website

N-UFD

Double Separated Anti-slip

UL wiring duct

(Wide sliver, Opened slot)



Description


■ **Material**
Manufactured with High quality rigid PVC, RoHS compliant.

■ **Flame retardancy**
UL94V-0, inflaming retarding material with good self extinguishing ability.

- **Construction**
1. If the width is over 40mm, the inner side of the cover will have the co-extruded anti-slip design, which make it easy to install and hard to fall apart at any angle (except for 45 width).
 2. Diverse bottom hole design, make it easy to install. square slot which is suitable for cable arrangement and make the section looks tidy.

■ **Color**
Grey RAL7030 (White. Blue.and Black colors can be customized).

■ **Working temperature**
-20℃~65℃

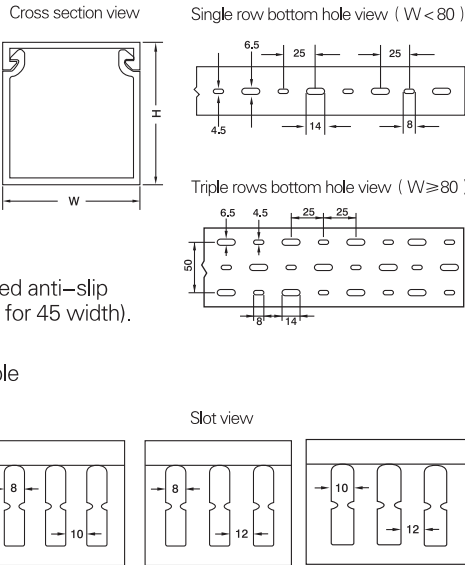

N-UFD wiring duct (Wide sliver, Opened slot)

Specification	Size (mm)		Slot Width mm	Sliver Width mm	Wire capacity 2.0mm² /pcs	Packing M
	H	W				
N-UFD 80 25	80	25	8	10	100-120pcs	60
N-UFD 80 30		30	8	10	100-125pcs	60
N-UFD 80 35		35	8	10	110-130pcs	60
N-UFD 80 40		40	8	10	140-160pcs	48
N-UFD 80 45		45	8	10	140-165pcs	48
N-UFD 80 50		50	8	10	160-180pcs	48
N-UFD 80 60		60	8	10	180-210pcs	36
N-UFD 80 80		80	8	10	240-290pcs	36
N-UFD 80 100		100	8	10	260-350pcs	24
N-UFD 80 120		120	8	10	280-380pcs	24
N-UFD 100 25	100	25	8	12	120-150pcs	48
N-UFD 100 30		30	8	12	130-165pcs	48
N-UFD 100 33		33	8	12	130-165pcs	48
N-UFD 100 35		35	8	12	130-165pcs	48
N-UFD 100 40		40	8	12	130-175pcs	48
N-UFD 100 50		50	8	12	220-250pcs	48
N-UFD 100 60		60	8	12	240-290pcs	32
N-UFD 100 80		80	8	12	260-350pcs	24
N-UFD 100 100		100	8	12	300-400pcs	24
N-UFD 100 120		120	8	12	380-480pcs	24
N-UFD 120 75	120	75	10	12	280-380pcs	24

Latest Information from our website

N-VFD

Double Separated Anti-slip

UL wiring duct

(Narrow sliver, Opened slot)



Description

Material

Manufactured with High quality rigid PVC, RoHS compliant. Using Elastic polymer anti-slip material in the inner side of the cover.

Flame retardancy

UL94V-0, inflaming retarding material with good self extinguishing ability.

Construction

1. If the width is over 40mm, the inner side of the cover will have the co-extruded anti-slip design, which make it easy to install and hard to fall apart at any angle (except for 45 width).
2. Diverse bottom hole design, make it easy to install. square slot which is suitable for cable arrangement and make the section looks tidy.


Color

Grey RAL7030 (White. Blue.and Black colors can be customized).


Working temperature

-20°C~65°C


Single row bottom hole view (W < 80)

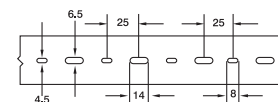


Triple rows bottom hole view (W ≥ 80)

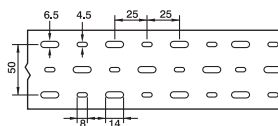

Cross section view



Slot view



N-VFD wiring duct (Narrow sliver, Opened slot)


Specification	Size (mm)		Slot Width mm	Sliver Width mm	Wire capacity 2.0mm² /pcs	Packing M
	H	W				
N-VFD 60 30	60	30	4	6	40-50pcs	80
N-VFD 60 40		40	4	6	100-115pcs	64
N-VFD 60 60		60	4	6	120-135pcs	48
N-VFD 60 80		80	4	6	180-210pcs	36
N-VFD 60 100		100	4	6	240-290pcs	32
N-VFD 65 33	65	33	4	6	40-75pcs	80
N-VFD 65 45		45	4	6	110-120pcs	80
N-VFD 65 65		65	4	6	180-200pcs	48
N-VFD 80 25	80	25	4	6	100-120pcs	60
N-VFD 80 30		30	4	6	100-125pcs	60
N-VFD 80 35		35	4	6	110-130pcs	60
N-VFD 80 40		40	4	6	140-160pcs	48
N-VFD 80 45		45	4	6	140-165pcs	48
N-VFD 80 50		50	4	6	160-180pcs	48
N-VFD 80 60		60	4	6	180-210pcs	36
N-VFD 80 80		80	4	6	240-290pcs	36
N-VFD 80 100		100	4	6	260-350pcs	24
N-VFD 80 120		120	4	6	280-380pcs	24
N-VFD 100 25	100	25	4	6	120-150pcs	48
N VFD 100 30		30	4	6	130-165pcs	48
N-VFD 100 33		33	4	6	130-165pcs	48
N-VFD 100 35		35	4	6	130-165pcs	48
N-VFD 100 40		40	4	6	130-175pcs	48
N-VFD 100 50		50	4	6	220-250pcs	48
N-VFD 100 60		60	4	6	240-290pcs	32
N-VFD 100 80		80	4	6	260-350pcs	24
N-VFD 100 100		100	4	6	300-400pcs	24
N-VFD 100 120		120	4	6	380-480pcs	24

Latest Information from our website

N-MD

Anti-slip UL

wiring duct(solid)

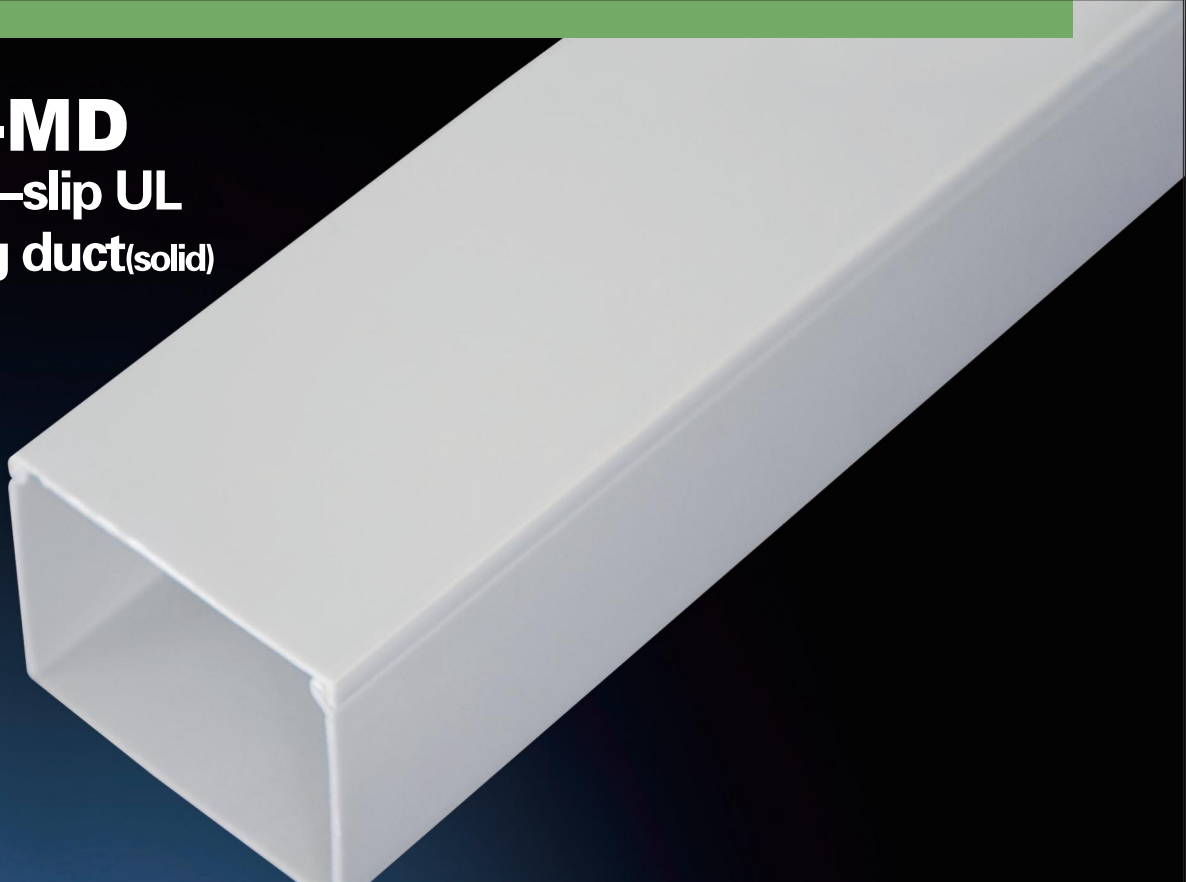

Description

Material

Manufactured with High quality rigid PVC, RoHS compliant. Using Elastic polymer anti-slip material in the inner side of the cover.

Flame retardancy

UL94V-0, inflaming retarding material with good self extinguishing ability.

Construction

1. If the width is over 40mm, the inner side of the cover will have the co-extruded anti-slip design, which make it easy to install and hard to fall apart at any angle (except for 45 width).
- 2.Solid design in order to enhance the strength and stability, also prevent the possible damage from external factors


Color

Grey RAL7030 (White. Blue.and Black colors can be customized).


Working temperature

-20°C~65°C

Cross section view



Slot view



N-MD Anti-slip ULwiring duct (Wide sliver, Closed slot)

Specification	Size (mm)		Wire capacity Wire cross-sectional area 2.0mm ²	Packing M
	H	W		
N-MD 25 25	25	25	10-25pcs	100
N-MD 30 20	30	20	15-25pcs	100
N-MD 30 25		25	15-25pcs	100
N-MD 35 35	35	35	35-50pcs	100
N-MD 40 25	40	25	20-25pcs	100
N-MD 40 30		30	35-40pcs	100
N-MD 40 40		40	60-70pcs	100
N-MD 40 50		50	50-70pcs	80
N-MD 40 60		60	100-115pcs	64
N-MD 40 80		80	140-160pcs	48
N-MD 45 33	45	33	40-55pcs	100
N-MD 45 45		45	60-70pcs	80
N-MD 50 25	50	25	20-25pcs	100
N-MD 50 35		35	40-60pcs	100
N-MD 50 45		45	70-80pcs	80
N-MD 50 50		50	80-90pcs	80
N-MD 50 60		60	100-120pcs	48
N-MD 50 80		80	160-180pcs	48
N-MD 60 25	60	25	40-45pcs	80
N-MD 60 30		30	40-50pcs	80
N-MD 60 40		40	100-115pcs	64
N-MD 60 50		50	100-120pcs	60
N-MD 60 60		60	120-135pcs	48
N-MD 60 80		80	180-210pcs	36
N-MD 60 100		100	240-290pcs	32
N-MD 65 33	65	33	40-75pcs	80
N-MD 65 45		45	110-120pcs	80
N-MD 65 65		65	180-200pcs	48
N-MD 80 25	80	25	100-120pcs	60
N-MD 80 30		30	100-125pcs	60
N-MD 80 35		35	110-130pcs	60
N-MD 80 40		40	140-160pcs	48
N-MD 80 45		45	140-165pcs	48
N-MD 80 50		50	160-180pcs	48
N-MD 80 60		60	180-210pcs	36
N-MD 80 80		80	240-290pcs	36
N-MD 80 100		100	260-350pcs	24
N-MD 80 120		120	280-380pcs	24
N-MD 100 30	100	30	130-165pcs	48
N-MD 100 33		33	130-165pcs	48
N-MD 100 35		35	130-165pcs	48
N-MD 100 40		40	130-175pcs	48
N-MD 100 50		50	220-250pcs	48
N-MD 100 60		60	240-290pcs	32
N-MD 100 80		80	260-350pcs	24
N-MD 100 100		100	300-400pcs	24
N-MD 100 120		120	380-480pcs	24
N-MD 120 75	120	75	280-380pcs	24
N-MD 130 100	130	100	420-600pcs	16
N-MD 140 35	140	35	230-300pcs	48
N-MD 150 100	150	100	450-650pcs	16

Latest Information from our website



YIFENG NEW MATERIALS



Wiring duct accessories

SWD-KB International standard cover / L/R-KB LSZH enhance version cover
N-KB LSZH cover / N-KB Anti-slip UL cover
DS Flexible dragon bone wiring duct / FD Open type flexible wiring duct
Wiring duct cutter / Wire retainer





SWD-KB

International standard cover


Description

- **Material**
Manufactured with high quality rigid PVC, ROHS compliant, low smoke.
- **Flame retardancy**
UL94 Flammability Rating of V-0, inflaming retarding material with good self extinguishing ability.
- **Construction**
Special marking line design on the cover can allow quick tag of relevant components.
- **Color**
GreyRAL 7004 (White. Blue.and Black colors can be customized).
- **Working temperature**
-20℃~65℃



Specification	W (mm)
SWD-KB 20	20
SWD-KB 25	25
SWD-KB 30	30
SWD-KB 33	33
SWD-KB 35	35
SWD-KB 40	40
SWD-KB 45	45
SWD-KB 50	50
SWD-KB 55	55
SWD-KB 60	60
SWD-KB 65	65
SWD-KB 80	80
SWD-KB 100	100
SWD-KB 120	120
SWD-KB 140	140

Latest Information from our website



N-KB Anti-slip UL cover

Specification	W (mm)
N-KB 25	25
N-KB 30	30
N-KB 33	33
N-KB 35	35
N-KB 40	40
N-KB 45	45
N-KB 50	50
N-KB 60	60
N-KB 65	65
N-KB 75	75
N-KB 80	80
N-KB 100	100
N-KB 120	120


Latest Information from our website

Description

- **Material**
Manufactured with High quality rigid PVC, RoHS compliant. Using Elastic polymer anti-slip material in the inner side of the cover.
- **Flame retardancy**
UL94V-0, inflaming retarding material with good self extinguishing ability.
- **Construction**
If the width is over 40mm, the inner side of the cover will have the co-extruded anti-slip design, which make it easy to install and hard to fall apart at any angle (except for 45 width).
- **Color**
GreyRAL 7030 (White. Blue.and Black colors (White. Blue.and Black colors can be customized).
- **Working temperature**
-20℃~65℃


L-KB

LSZH cover

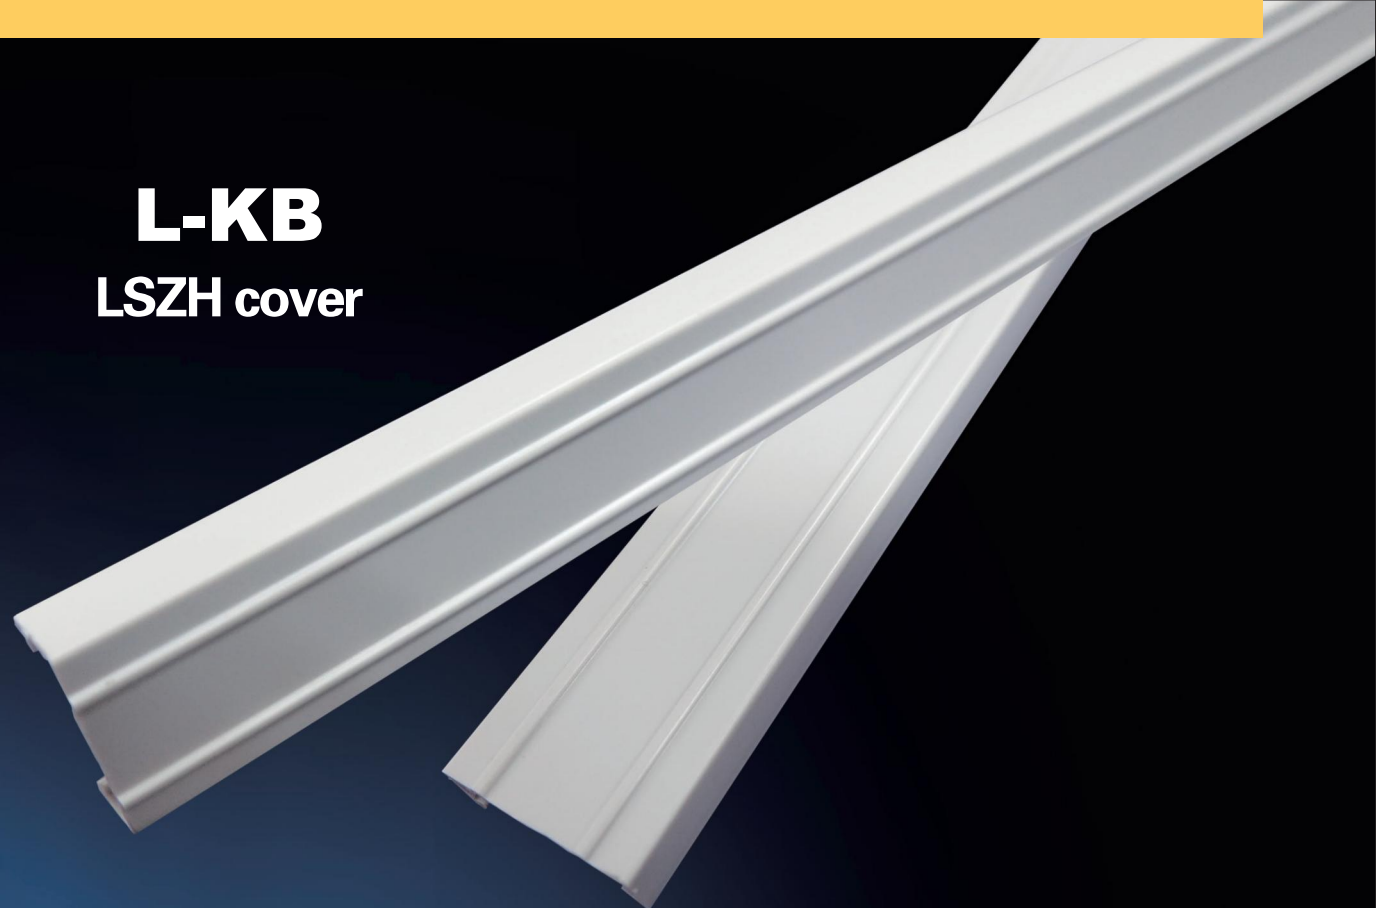



Description

- **Material**
PC+ABS, halogen free, Low smoke, RoHS compliant, Insulating material, Electrical safety, Fire safety.
- **Flame retardancy**
UL94V-0, Non-flame propagator.
- **Construction**
Special marking line design on the cover can allow quick tag of relevant components.
- **Color**
Grey RAL 7035
- **Specifications**
EN 45545, DIN 5510-2
- **Working temperature**
-40°C~90°C



Specification	W (mm)
L-KB 25	25
L-KB 30	30
L-KB 33	33
L-KB 35	35
L-KB 40	40
L-KB 45	45
L-KB 50	50
L-KB 60	60
L-KB 75	75
L-KB 80	80
L-KB 100	100
L-KB 120	120

Latest Information from our website

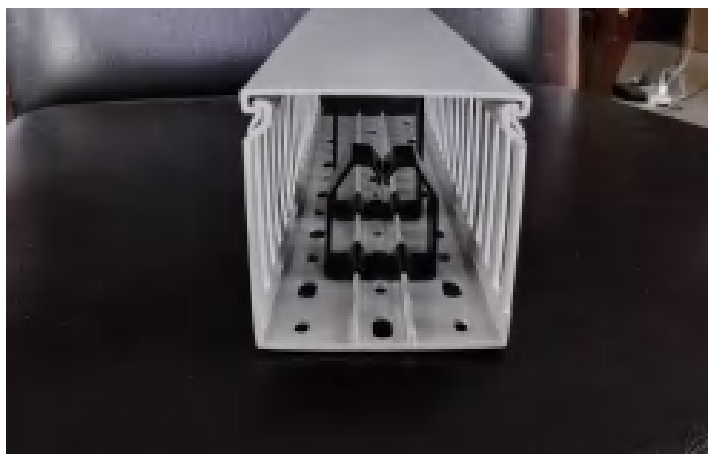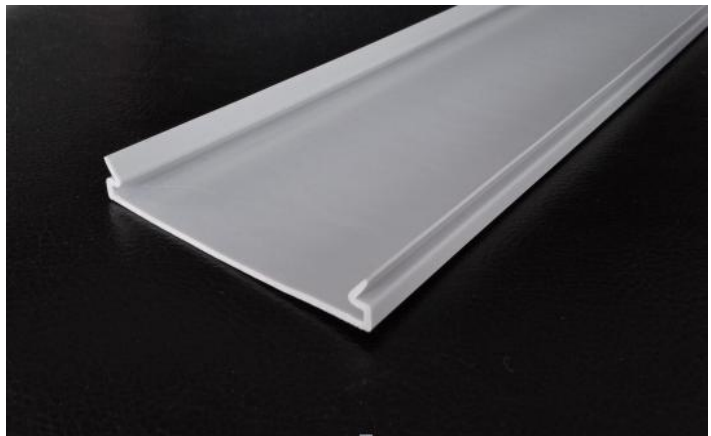

L/R-KB LSZH

enhance version cover

Specification	W (mm)
L/R-KB 25	25
L/R-KB 37.5	37.5
L/R-KB 50	50
L/R-KB 75	75
L/R-KB 100	100


Latest Information from our website

Description

- **Material**
PC+ABS, halogen free, Low smoke, RoHS compliant, Insulating material, Electrical safety, Fire safety.
- **Flame retardancy**
UL94V-0, Non-flame propagator.
- **Construction**
The cover design of double layer structure, Easy to install and never fall off.
- **Color**
Grey RAL 7035 (White. Blue.and Black colors can be customized).
- **Certification**
EN 45545, DIN 5510-2
- **Working temperature**
-40°C~90°C

DS

Flexible dragon bone wiring duct

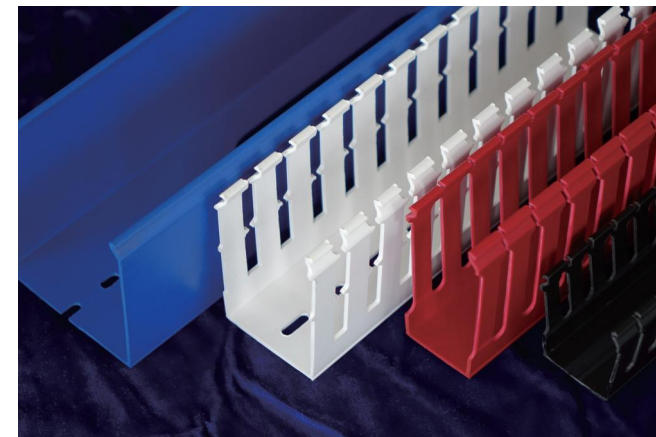



Customization

- 1. Specify length
- 2. Special bottom hole
size: 30*130 40*140
- * PVC only
- 3. Cover right angle bend
- 4. Special color




Description

- Material**
Eco-flame retardant PP
- Flame retardancy**
UL94V-0, Non-flame propagator.
With tape on the back, flexible. Suitable for joint of the cabinet and its door.

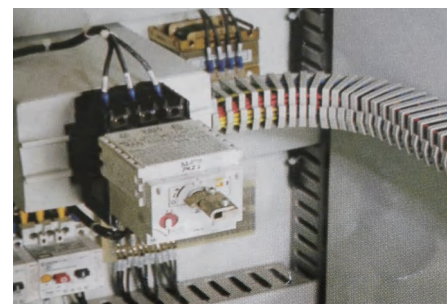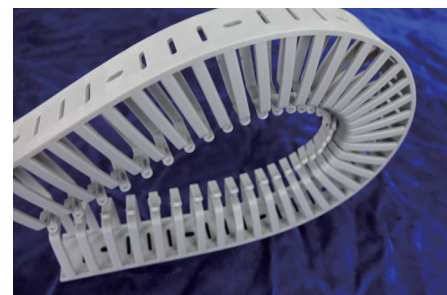

Specification	Size (mm)		
	W	H	L
DS-20	17	25	500
DS-30	30	40	500

Latest Information from our website

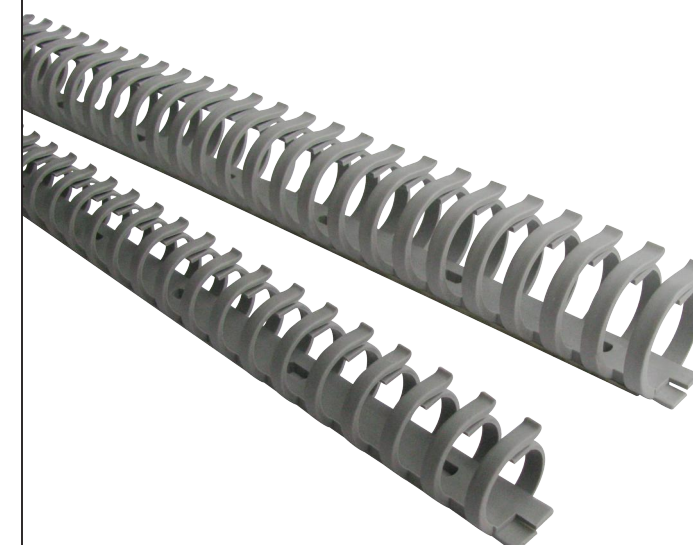

FD Open type flexible wiring duct

Description

- Material**
NYLON 66 (GY)
- With tape on the back, flexible. Suitable for joint of the cabinet and its door. Can be extend by connection.


Specification	Size (mm)		
	W	H	L
FD-20	20.4	14.4	500
FD-30	29	24.9	500
FD-40	39	36	500

Latest Information from our website

Wiring Duct Cutter



YWT-1

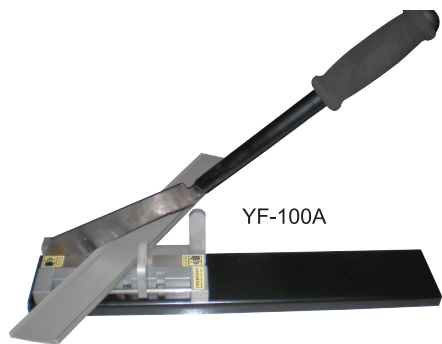

YF-100A


Specification	Blade length	Applicable product width
YWT-1	65mm	≤60mm
YF-100A	115mm	≤80mm
MTS-01	60mm	≤60mm

Latest Information from our website



MTS-01 is used for cutting PC+ABS, the blade tip is used for cutting edge lines

Specification	Applicable product width
WSP-60	WIER SLOT PLIER

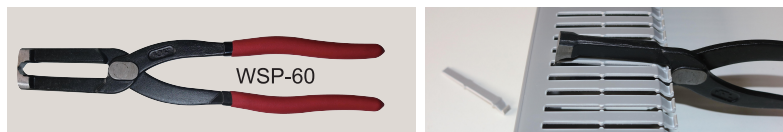


WSP-60

Wire Retainer

Description

- **Materials**
Eco-flame retardant PP
- **Flame retardancy**
UL94-V0
- **Color**
Grey(Red、Green ang Black colors can be customized).
- **Construction**
Can be installed on the bottom rail of the trunking and able to be slipped, in order to retain the cable and save the space.



Specification	Size (mm) (HxW)	Packing M
RT-4040	40*40	100PCS
RT-6840	68*40	
RT-6865	68*65	

Latest Information from our website

Without wire retainer



With wire retainer



Business Cooperation +



Choose Us
Trust Us

SIEMENS



SIEMENS Gamesa
RENEWABLE ENERGY



TOSHIBA



Rockwell Automation

