

SY-M80W


High Efficiency, High Quality PV Module




Electrical Characteristics	SY-M80W
Maximum power (Pmax)	80W
Voltage at Pmax (Vmp)	18.2V
Current at Pmax (Imp)	4.42A
Open-circuit voltage (Voc)	22.6V
Short-circuit current (Isc)	4.65A
Temperature coefficient of Voc	-(0.40 ± 0.05)%/ °C
Temperature coefficient of Isc	(0.065 ± 0.01)% /°C
Temperature coefficient of power	-(0.5±0.05)%/ °C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Power tolerance	± 3%
Cells	multicrystalline silicon solar cell
No. of cells and connections	36(4X9)
Module Dimension	780mm[30.71in.]x670mm[26.38in.]x30mm[1.18in.]
Weight	5.9kg[12.98lbs]

* STC:Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C
 * Specifications are subject to change without notice at any time.


Module Diagram

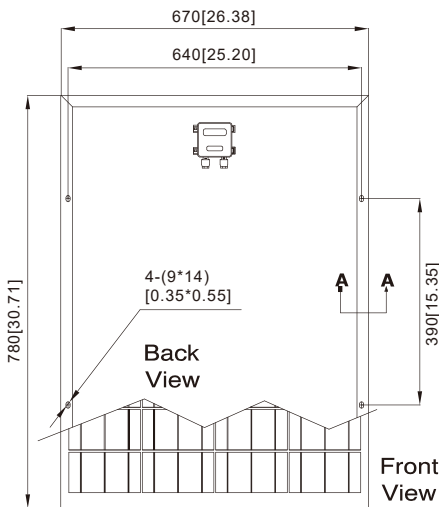

Dimensions in brackets are in inches.
 Un-bracketed dimensions are in millimeters.
 Unit:mm[in.]





Junction Box
 Top View (Lid open)



Section A-A

I-V Curves

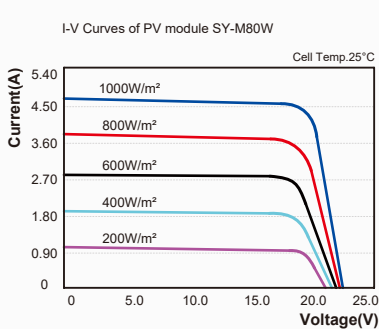

Key Features:

- High module efficiency and stable power output
- Based on leading process technology
- Outstanding electrical performance under high temperature conditions or low irradiance conditions
- Easy of installation and all-weather applications
- 5 years product warranty(materials and workmanship)
- 25 years module power output warranty
- Peak power of single module is guaranteed in +3% power tolerance
- Strong framed module, passing loaded test of 5400 Pa (IEC61215 2nd)
- The manufacture is certified for ISO 9001:2008

Product's Guarantee

- 5 years products life warranty
- 12 years module power output no less 90%
- 25 years module power output no less 80%

Applications

- Off grid residential roof-tops
- Off grid commercial/industrial roof-tops
- Rural area applications
- Solar power system
- Other off-grid applications



SUNYO Solar Technology

Address: Youyi Village, Luoyang Town, Wujin District, Changzhou, Jiangsu, P.R.China
Tel: 86-519-88790861
 86-519-88791962
Fax: 86-519-88792861
E-mail: sales@sunyoo.com
Website: www.sunyoo.com